



TC-C34GN Spec:I5/E/Y/C/2.8(4)mm/V4.2

4MP Fixed IR Bullet Camera

Lite Series



KEY FEATURES

- Metal+Plastic Housing
- Up to 2688x1520@25fps
- S+265/H.265/H.264
- Min. illumination Color: 0.02Lux@F1.6
- Smart IR, IR Range: 50m
- Built-In Mic
- Support tripwire and perimeter
- Operating Conditions -30°C~60°C, 0~95% RH
- POE, IP67



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596065
Fax: +86-22-58596048

SPECIFICATIONS

Camera	
Image Sensor	1/2.7"
Signal System	PAL/NTSC
Min. Illumination	Color:0.02Lux@(F1.6,AGC ON),B/W:0Lux with IR
Shutter Time	1s to 1/100,000s
Day&Night	Dual IR Cut Filter with Auto Switch
WDR	Digital WDR
Lens	
Lens Type	Fixed
Focal Length	2.8(4)mm
Lens Mount	M12
Aperture Range	F1.6,Fixed
Field of View	Horizontal field of view:103.8°(2.8mm)/88.2°(4mm); Vertical field of view:56.1°(2.8mm)/46.4°(4mm); Diagonal field of view:119°(2.8mm)/100°(4mm);
Illuminator	
IR LEDs	2
IR Distance	Up to 50m
Wavelength	850nm
White LEDs	N/A
Compression Standard	
Video Compression	S+ 265/H.265/H.264B/H.264M/H.264H
Video Bit Rate	32kbps~6Mbps
Audio Compression	G.711A/G.711U/ADPCM_D
Audio Sampling Rate	8kHz/32kHz/48kHz
Image	
Max. Resolution	2688x1520
Main Stream	PAL:25fps (2688x1520,2560x1440,2304x1296,1920x1080,1280x720) NTSC:24fps (2688x1520,2560x1440) 30fps (2304x1296,1920x1080,1280x720)
Sub Stream	PAL:25fps(704x576,704x288,352x288,640x360) NTSC:30fps(704x480,704x240,352x240,640x360)
Image Setting	Saturation,brightness,contrast,sharpness,adjustable by client software or web browser
Image Enhancement	BLC/3D DNR/HLC
ROI	Yes,8 regions
OSD	16*16/32*32/48*48/64*64,adaptable size,Letters Such as Week,Date,Time,Total 1 Regions
Picture Overlay	N/A
Privacy Mask	Yes,4 regions
Defog	Yes

Tiandy

Feature	
Alarm Trigger	IP Address Conflict,Motion Detection,Mask Alarm
Video Analytics	Tripwire,Perimeter
Network	
ANR	N/A
Protocols	HTTP,HTTPS,TCP/IP,UDP,UPnP,ICMP,DHCP,DNS,DDNS Easy,DDNS,NTP,QoS,IPv4
System Compatibility	onvif Profile S/T/G,CGI,MILSTONE
Remote Connection	2
Client	Easy7,EasyLive Plus
Web	IE,Firefox,Edge,Safari,Chrome
Interface	
Communication Interface	1 RJ45 10M/ 100M self adaptive Ethernet port
Audio I/O	N/A
Alarm I/O	N/A
Built-In Mic	Yes
Built-In Speaker	N/A
Reset Button	N/A
On-board storage	N/A
General	
Web Client Language	18 languages English,Russian,Spanish,Korean,Italian,Turkish,Simple Chinese,Traditional Chinese,Thai,French,Polish,Dutch,Hebrew,Arabic,Vietnamese,German,Ukrainian,Portuguese
Operating Conditions	-30°C~60°C,0~95%RH
Power Supply	POE,802.3af
Power Consumption	≤7W
Protection	IP67
Heater	N/A
Boundary Dimensions	208x80x80mm
Package Dimensions	210x92x110mm
GrossWeight	0.47kg
NetWeight	0.32kg

* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.




AVAILABLE MODEL

TC-C34GN SPEC: I5/E/Y/C/2.8MM/V4.2

TC-C34GN SPEC: I5/E/Y/C/4MM/V4.2

DIMENSIONS (Unit: mm)

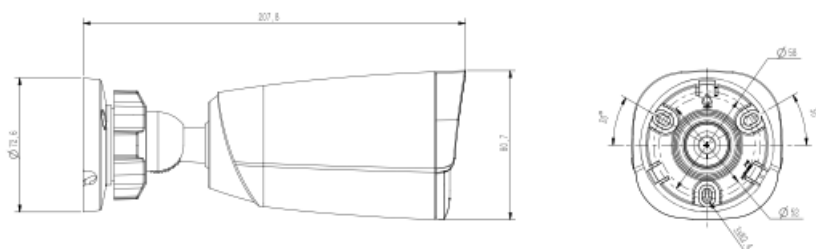

ACCESSORIES



A22
JUNCTION BOX

DISTRIBUTED BY



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596065
Fax: +86-22-58596048