



TC-C32GS Spec:I5/E/Y/C/SD/2.8(4)mm/V4.2

2MP Fixed Starlight IR Bullet Camera

Lite Series



KEY FEATURES

- Metal+Plastic Housing
- Up to 1920×1080@30fps
- S+265/H.265/H.264
- Min. illumination Color: 0.002Lux@F1.6
- Smart IR, IR Range: 50m
- Built-In Mic
- Support tripwire and perimeter
- Operating Conditions -30°C~60°C, 0~95% RH
- POE, IP67



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com

Website: en.tiandy.com

Tel: +86-22-58596065

Fax: +86-22-58596048

SPECIFICATIONS

Camera	
Image Sensor	1/2.8"
Signal System	PAL/NTSC
Min. Illumination	Color:0.002Lux@(F1.6,AGC ON),B/W:0Lux with IR
Shutter Time	1s to 1/100,000s
Day&Night	Dual IR Cut Filter with Auto Switch
WDR	120dB
Lens	
Lens Type	Fixed
Focal Length	2.8(4)mm
Lens Mount	M12
Aperture Range	F1.6,Fixed
Field of View	Horizontal field of view:99.7°(2.8mm)/83.3°(4mm); Vertical field of view:55.1°(2.8mm)/46.8°(4mm); Diagonal field of view:115°(2.8mm)/96°(4mm);
Illuminator	
IR LEDs	2
IR Distance	Up to 50m
Wavelength	850nm
White LEDs	N/A
Compression Standard	
Video Compression	S+ 265/H.265/H.264B/H.264M/H.264H
Video Bit Rate	32kbps~6Mbps
Audio Compression	G.711A/G.711U/ADPCM_D
Audio Sampling Rate	8kHz/32kHz/48kHz
Image	
Max. Resolution	1920x1080
Main Stream	PAL:25fps (1920x1080,1280x720,640x480,704x576)
	NTSC:30fps (1920x1080,1280x720,640x480,704x480)
Sub Stream	PAL:25fps(704x576,704x288,352x288,640x360)
	NTSC:30fps(704x480,704x240,352x240,640x360)
Image Setting	Saturation,brightness,contrast,sharpness,adjustable by client software or web browser
Image Enhancement	BLC/3D DNR/HLC
ROI	Yes,8 regions
OSD	16*16/32*32/48*48,adaptable size,Letters Such as Week,Date,Time,Total 1 Regions
Picture Overlay	N/A
Privacy Mask	Yes,4 regions
Defog	Yes



Feature	
Alarm Trigger	Disk Full,Disk R/W Error, IP Address Conflict,Motion Detection,Mask Alarm
Video Analytics	Tripwire,Perimeter
Network	
ANR	Yes
Protocols	HTTP,HTTPS,TCP/IP,UDP,UPnP,ICMP,DHCP,DNS,DDNS EasyDDNS,NTP,QoS,IPv4
System Compatibility	onvif Profile S/T/G,CGI,MILSTONE
Remote Connection	2
Client	Easy7,EasyLive Plus
Web	IE,Firefox,Edge,Safari,Chrome
Interface	
Communication Interface	1 RJ45 10M/ 100M self adaptive Ethernet port
Audio I/O	N/A
Alarm I/O	N/A
Built-In Mic	Yes
Built-In Speaker	N/A
Reset Button	Yes
On-board storage	Yes
General	
Web Client Language	18 languages English,Russian,Spanish,Korean,Italian,Turkish,Simple Chinese,Traditional Chinese,Thai,French,Polish,Dutch,Hebrew,Arabic,Vietnamese,German,Ukrainian,Portuguese
Operating Conditions	-30°C~60°C,0~95%RH
Power Supply	POE,802.3af
Power Consumption	≤7W
Protection	IP67
Heater	N/A
Boundary Dimensions	208x80x80mm
Package Dimensions	210x92x110mm
GrossWeight	0.47kg
NetWeight	0.32kg

* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.




AVAILABLE MODEL

TC-C32GS SPEC: I5/E/Y/C/SD/2.8MM/V4.2

TC-C32GS SPEC: I5/E/Y/C/SD/4MM/V4.2

DIMENSIONS (Unit: mm)

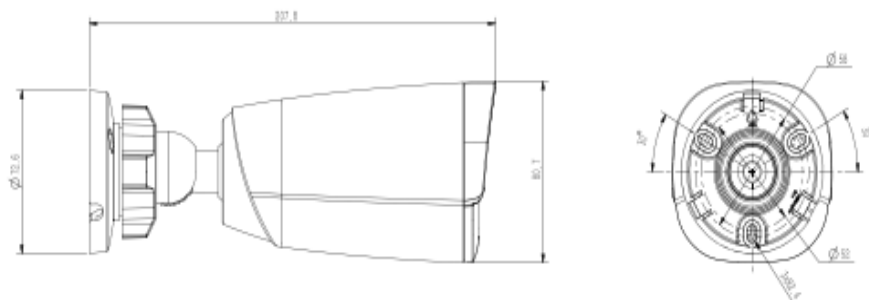

ACCESSORIES



A22
JUNCTION BOX

DISTRIBUTED BY



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596065
Fax: +86-22-58596048