



TC-C35US Spec:I8/A/E/Y/M/C/H/2.7-13.5mm/V4.0

# 5MP Motorized Starlight IR Bullet Camera

Lite Series



## KEY FEATURES

- Full Metal Housing
- Motorized Lens 2.7-13.5mm
- Up to 2592×1944@20fps
- S+265/H.265/H.264
- Min. illumination Color: 0.002Lux@F1.6
- Smart IR, IR Range: 80m
- Support tripwire and perimeter
- Built-in Mic, SD Card Slot, Reset Button
- Audio I/O 1/1, Alarm I/O 1/1
- Operating Conditions -35°C~60°C, 0~95% RH
- DC12V, POE
- IP67



**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com)

Website: [en.tiandy.com](http://en.tiandy.com)

Tel: +86-22-58596065

Fax: +86-22-58596048



## SPECIFICATIONS

| Camera               |                                                                                                                                                 |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor         | 1/2.8"                                                                                                                                          |
| Signal System        | PAL/NTSC                                                                                                                                        |
| Min. Illumination    | Color:0.002Lux@(F1.6,AGC ON),B/W:0Lux with IR                                                                                                   |
| Shutter Time         | 1s to 1/100,000s                                                                                                                                |
| Day&Night            | Dual IR Cut Filter with Auto Switch                                                                                                             |
| WDR                  | 120dB                                                                                                                                           |
| Angle Adjustment     | 0~360°,0~90°,0~360°                                                                                                                             |
| Lens                 |                                                                                                                                                 |
| Lens Type            | Motorized                                                                                                                                       |
| Focal Length         | 2.7~13.5mm                                                                                                                                      |
| Lens Mount           | Φ 14                                                                                                                                            |
| Aperture Range       | F1.6,Fixed                                                                                                                                      |
| Field of View        | Horizontal field of view:96.2°~29.2°;<br>Vertical field of view:70.3°~22°                                                                       |
| Illuminator          |                                                                                                                                                 |
| IR LEDs              | 4                                                                                                                                               |
| IR Distance          | Up to 80m                                                                                                                                       |
| Wavelength           | 850nm                                                                                                                                           |
| White LEDs           | N/A                                                                                                                                             |
| Compression Standard |                                                                                                                                                 |
| Video Compression    | S+ 265/H.264B/H.264M/H.264H                                                                                                                     |
| Video Bit Rate       | 32kbps~6Mbps                                                                                                                                    |
| Audio Compression    | G.711A/G.711U/ADPCM_D                                                                                                                           |
| Audio Sampling Rate  | 8kHz/32kHz/48kHz                                                                                                                                |
| Image                |                                                                                                                                                 |
| Max. Resolution      | 2592x1944                                                                                                                                       |
| Main Stream          | PAL:20fps(2592x1944),25fps(2560x1440,2304x1296,1920x1080,1280x720)<br>NTSC:20fps(2592x1944),24fps(2560x1440)30fps(2304x1296,1920x1080,1280x720) |
| Sub Stream           | PAL:25fps(704x576,704x288,352x288,640x360)<br>NTSC:30fps(704x480,704x240,352x240,640x360)                                                       |
| Third Stream         | N/A                                                                                                                                             |
| Image Setting        | Saturation,brightness,contrast,sharpness,adjustable by client software or web browser                                                           |
| Image Enhancement    | BLC/3D DNR/HLC/AGC                                                                                                                              |
| ROI                  | Yes,8 regions                                                                                                                                   |
| OSD                  | 16*16/32*32/48*48/64*64,adaptable size,Letters Such as Week,Date,Time,Total 1 Regions                                                           |
| Picture Overlay      | N/A                                                                                                                                             |
| Privacy Mask         | Yes,4 regions                                                                                                                                   |
| Defog                | Yes                                                                                                                                             |



| Feature                 |                                                                                                                                                                                 |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alarm Trigger           | Disk Full,Disk R/W Error,IP Address Conflict,Event Input, Event Output,Motion Detection,Mask Alarm                                                                              |
| Video Analytics         | Tripwire,Perimeter                                                                                                                                                              |
| Network                 |                                                                                                                                                                                 |
| ANR                     | Yes                                                                                                                                                                             |
| Protocols               | HTTP,HTTPS,TCP/IP,UDP,UPnP,ICMP,DHCP,DNS,DDNS,Easy DDNS,NTP,QoS,IPv4                                                                                                            |
| System Compatibility    | onvif Profile S/T/G,CGI,MILSTONE                                                                                                                                                |
| Remote Connection       | 2                                                                                                                                                                               |
| Client                  | Easy7,EasyLive Plus                                                                                                                                                             |
| Web                     | IE,Firefox,Edge,Safari,Chrome                                                                                                                                                   |
| Interface               |                                                                                                                                                                                 |
| Communication Interface | 1 RJ45 10M/ 100M self adaptive Ethernet port                                                                                                                                    |
| Audio I/O               | 1/1                                                                                                                                                                             |
| Alarm I/O               | 1/1                                                                                                                                                                             |
| Built-In Mic            | Yes                                                                                                                                                                             |
| Built-In Speaker        | N/A                                                                                                                                                                             |
| Reset Button            | Yes                                                                                                                                                                             |
| On-board storage        | Built-in MicroSD card slot,up to 512 GB                                                                                                                                         |
| General                 |                                                                                                                                                                                 |
| Web Client Language     | 18 languages<br>English,Russian,Spanish,Korean,Italian,Turkish,Simple Chinese,Traditional Chinese,Thai,French,Polish,Dutch,Hebrew,Arabic,Vietnamese,German,Ukrainian,Portuguese |
| Operating Conditions    | -35°C~60°C,0~95%RH                                                                                                                                                              |
| Power Supply            | DC 12V±25%, PoE(802.3af)                                                                                                                                                        |
| Power Consumption       | ≤9W                                                                                                                                                                             |
| Protection              | IP67                                                                                                                                                                            |
| Heater                  | N/A                                                                                                                                                                             |
| Boundary Dimensions     | 238mmx90mmx90mm                                                                                                                                                                 |
| Package Dimensions      | 355mmx145mmx160mm                                                                                                                                                               |
| GrossWeight             | 1.26kg                                                                                                                                                                          |
| NetWeight               | 0.93kg                                                                                                                                                                          |


\* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.



## AVAILABLE MODEL

TC-C35US Spec:I8/A/E/Y/M/C/H/2.7-13.5mm/V4.0

## DIMENSIONS

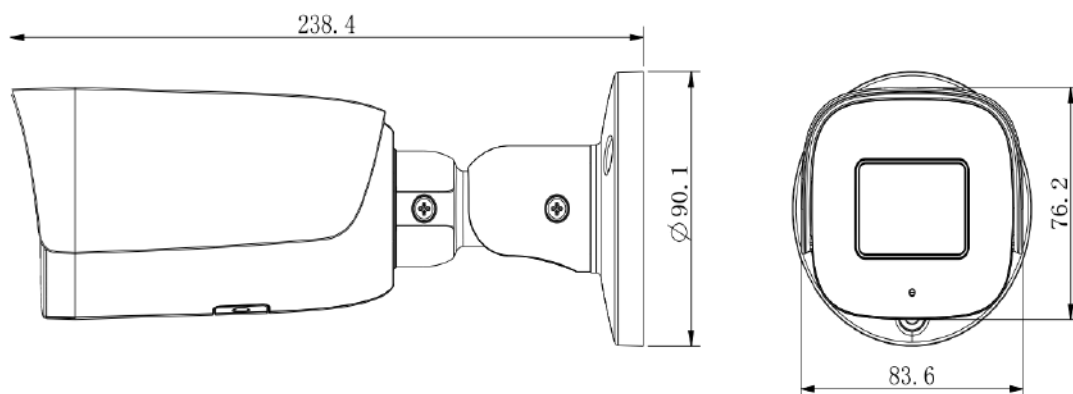

## ACCESSORIES



A35  
CORNER MOUNT



TC-P54BM SPEC: V5  
JUNCTION BOX



A36  
POLE MOUNT

DISTRIBUTED BY



**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com)  
Website: [en.tiandy.com](http://en.tiandy.com)

Tel: +86-22-58596065  
Fax: +86-22-58596048