

Tiandy



TC-C32MS Spec: I5/A/E/Y/M/H/I/2.7-13.5mm/V4.1 2MP Starlight Motorized IR Dome Camera



Pro Series

KEY FEATURES

- Full Metal Housing
- Motorized Lens 2.7-13.5mm
- Up to 1920x1080@30fps
- S+265/H.265/H.264/M-JPEG
- Min. illumination Color: 0.001Lux@F1.6
- Smart IR, IR Range: 50m
- Support Video Analytics
- Support Human/Vehicle Classification
- Support Face Capture Mode
- Built-in Mic, audio I/O 1/1, alarm I/O 2/1
- Plugin Free
- Operating Conditions -35°C~65°C, 0~95% RH
- POE, IP67, IK10



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596178
Fax: +86-22-58596048



SPECIFICATIONS

Camera	
Image Sensor	1/2.8" CMOS
Signal System	PAL/NTSC
Min. Illumination	Color:0.001Lux@(F1.6,AGC ON),B/W:0.0002Lux 0Lux with IR
Shutter Time	1s to 1/100,000s
Day & Night	Dual IR Cut Filter with Auto Switch
WDR	120dB
Angle Adjustment	pan 0~330°,tilt 0~75°,roate 0~350°
Lens	
Lens Type	Motorized
Focus	2.7-13.5mm
Lens Mount	Φ14
Aperture	F1.6 DC Iris
FOV	Horizontal field of view:96.4°~31.4; Vertical field of view:53.5~17.7°
Illuminator	
IR LEDs	18
IR Range	Up to 50m
Wavelength	850nm
White LEDs/Warmlights	N/A
Compression Standard	
Video Compression	S+265/H.265/H.264/M-JPEG
Video Bit Rate	32Kbps~8Mbps
Audio Compression	G.711A/G.711U/ADPCM_D_D/AAC_LC
Audio Bit Rate	8K,32K,48Kbps
Image	
Max. Resolution	1920x1080
Main Stream	PAL:25fps(1920x1080,1280x720,704x576,640x480) NTSC:30fps(1920x1080,1280x720,704x480,640x480)
Sub Stream	PAL:25fps(704x576,704x288,640x360,352x288) NTSC:30fps(704x480,704x240,640x360,352x240)
Third Stream	PAL:25fps(704x576,704x288,352x288) NTSC:30fps(704x480,704x240,352x240)
Image Setting	Saturation,brightness,contrast,sharpness,adjustable by client software or web browser
Image Enhancement	BLC/3D DNR/HLC/Corridor Format
ROI	Support 8 fixed regions of coding
OSD	16x16,32x32,48x48,64x64,adaptable size,Letters Such as Week,Date,Time,Total 5 Regions
Picture Overlay	Yes
Privacy Mask	Yes,4 regions
Smart Defog	Yes
Feature	
Alarm Trigger	Event Input,Event Output,Motion Detection,Mask Alarm,Disk Full,Disk R/W Error,IP Address Conflict,MAC Address Conflict,FTP Server Exception,Voltage Abnormal,Video Abnormal,Audio Abnorma
Video Analytics	Tripwire,Double Tripwire,Perimeter,Object Abandon,Object Lost,Loitering,Running,Parking,Crowed, People Counting,On Duty Detection,Heatmap,Face Capture,Safety Helmet Detection,Human/Vehicle Classification
Early Warning(EW)	N/A
Network	
ANR	Yes(Only Support Tiandy ANR NVR)
Protocols	RTSP,SRTP,HTTP,HTTPS,TCP/IP,UDP,UPnP,ICMP,IGMP,SNMP,DHCP,DNS,DDNS,Easy DDNS,NTP,SMTP,IEEE802.1x,QoS,IPv4,IPv6,PPPOE,SSH,SSL,Multicast,Unicast,RTCP,ARP,FTP,NFS
System Compatibility	ONVIF(PROFILE S/T/G),SDK,CGI,Milestone,P2P
Remote Connection	2
Client	Easy7,EasyLive
Web Version	Web6




Interface	
Communication Interface	1 RJ45 10M/ 100M self adaptive Ethernet port,RS 485
Audio I/O	1/1,Mic in
Alarm I/O	2/1
Speaker	N/A
Reset Button	Yes
On-board storage	Built-in MicroSD card slot,up to 512 GB
General	
Web Client Language	17 languages Simplified Chinese/English/Traditional Chinese/Spanish/Italian/Korean/Turkish/Russian/Thai/ Polish/French/Dutch/Hebrew/Persian/Vietnamese/Arabic/German/Ukrainian
Operating Conditions	-35°C~65°C ,0~95% RH
Power Supply	DC12V±25%/PoE(IEEE802.3af)
Power Consumption	MAX:7.5W(12V) MAX:9W(PoE)
Protection	IP67,IK10 Lightning protection, surge protection and voltage transient protection meets EN 55035:2017
Heater	N/A
Dimensions	Φ143x124mm(Φ5.63x4.88inch)
GrossWeight	1.16Kg(2.55lb)
NetWeight	0.88Kg(1.94lb)

* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.


AVAILABLE MODEL

TC-C32MS SPEC: I5/A/E/Y/M/H/I/2.7-13.5MM/V4.1

DIMENSIONS (Unit: mm)

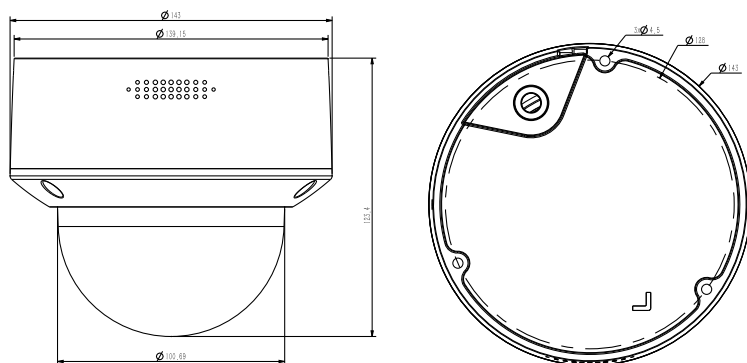

ACCESSORIES



A28
Wall Mount

TC-P54BM Spec: V3
Junction Box

DISTRIBUTED BY



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596178
Fax: +86-22-58596048