


# 26 Ports Full Gigabit Rack-mounted Non-managed Switch

ST3126GS

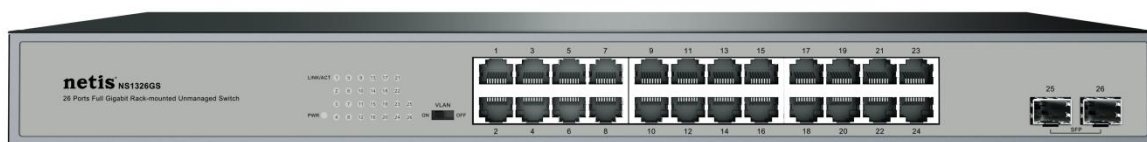

## OVERVIEW:

The Netis ST3126GS full gigabit rack-mounted non-managed switch provides 24\* 10/100/1000M adaptive RJ45 ports and 2 gigabit SFP ports. Equipped with standard hangers, can match on the standard cabinet rack. It is suitable for a variety of network environments, supporting long-range transmission, more rapid and more stable, small and medium-sized office spaces are mainly recommended for use.

## FEATURES:

- 24 10/100/1000M RJ45 ports and 2 gigabit SFP ports
- MAC address auto-learning & auto-aging
- 4KV surge protection
- Supports 2K MAC addresses
- 52 Gbps backplane bandwidth
- Port isolation, data transmission will not affect the other ports
- Installation is not limited, more convenient networking
- Plug and play, no configuration required

## SPECIFICATION:

Hardware	
Interface	24 * 10/100/1000M RJ45 port 2 * gigabit SFP
LED	PWR 1X-26X
Power Supply	Built-in supply the 12V/1A power
Dimensions (L x W x H )	528 * 478 * 316mm
Software	
Standard	IEEE802.3,IEEE802.3u,IEEE802.3z ,IEEE802.3x
Backplane bandwidth	52G
Packet forwarding rate	38.68Mbps
Data Transmission Rate	10Mbps(Half-duplex and Full-duplex) 100Mbps(Half-duplex and Full-duplex) 1000Mbps(Full-duplex)
Model	Normal mode (default) Port VLAN(On):Port Vlan function is enabled: Ports 1-24 are isolated from each other and can only communicate with SFP1 and SFP2. SFP1 and SFP2 are able to communicate freely.
Others	
Environment	Operating Temperature: 0℃~40℃ Storage Temperature: -20℃~70℃ Operating Humidity: 10%~90% RH non-condensing Storage Humidity: 5%~90% RH non-condensing