

SPECIFICATION

PHOTO:



PRODUCT DESCRIPTIONS

1. Adopt high brightness LEDs as light source with low light decay.
2. High density and flexibility with good heat dissipation.
3. 2 OZ FPC, original high quality tape
4. Easy to install and preserve, can be bent freely, with 3M tape on the backside
5. High color efficiency, uniform illumination with wide view beam angle
6. Low voltage (DC12V, DC24V) for human safety, various colors available.

DETAILS:

MODEL : W2835NK-600D

SIZE: 8MM PCB WIDTH

POWER: 8W/M

INPUT VOLTAGE : DC12V

CCT: 3000K / 4000K / 6500K / BLUE



LUMINOUS FLUX: 550lm/M

POWER FACTOR: >0.5

IP RATING : IP20

CRI: Ra>80

LIFESPAN: 15000hrs



LIGHT SOURCE : LED 2835 SMD - 600 LEDs

MATERIAL : COPPER PCB + LEDs

PCAKAGE: 5M/ROLL/COLOR BOX

WARRANTY : 1 YEAR WARRANTY

CONNECT METHOD :

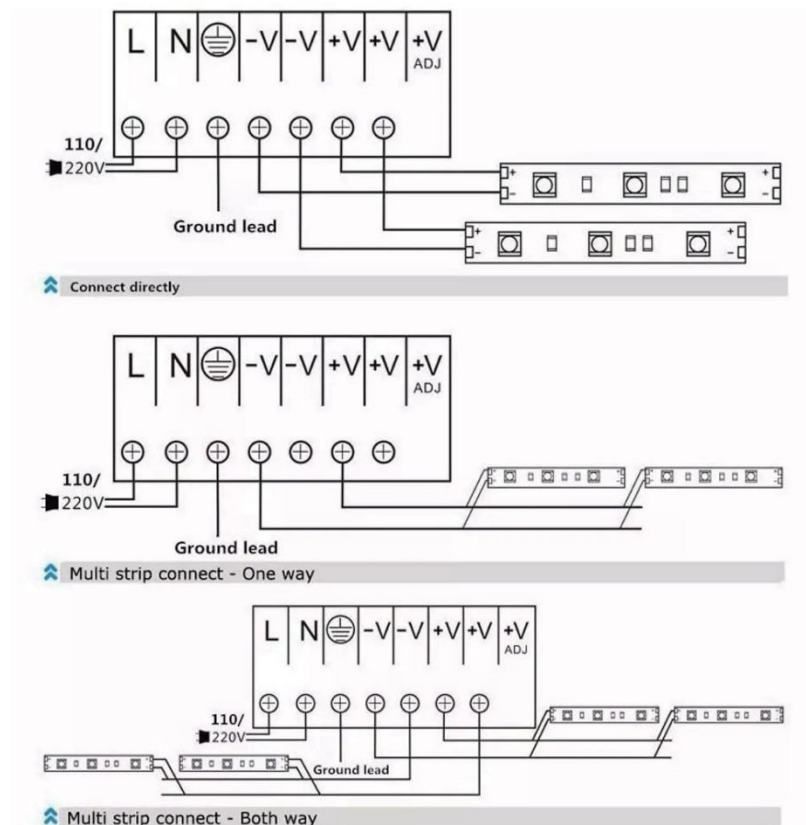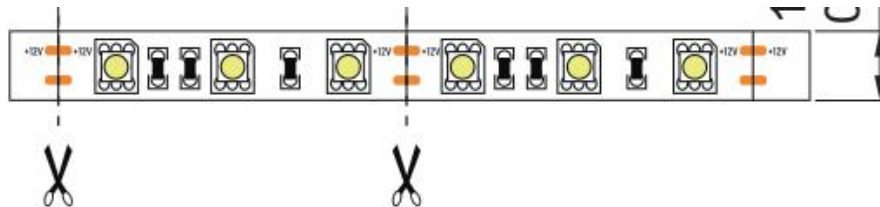

APPLICATION:

IN DOOR LIGHTING ONLY , HOME DECARATION , BEDROOM, ETC.